D15/113
RECD. 10/7/76
D7-308

Curtis®

AUTOMATIC COFFEE URNS

ELECTRIC – GAS – STEAM

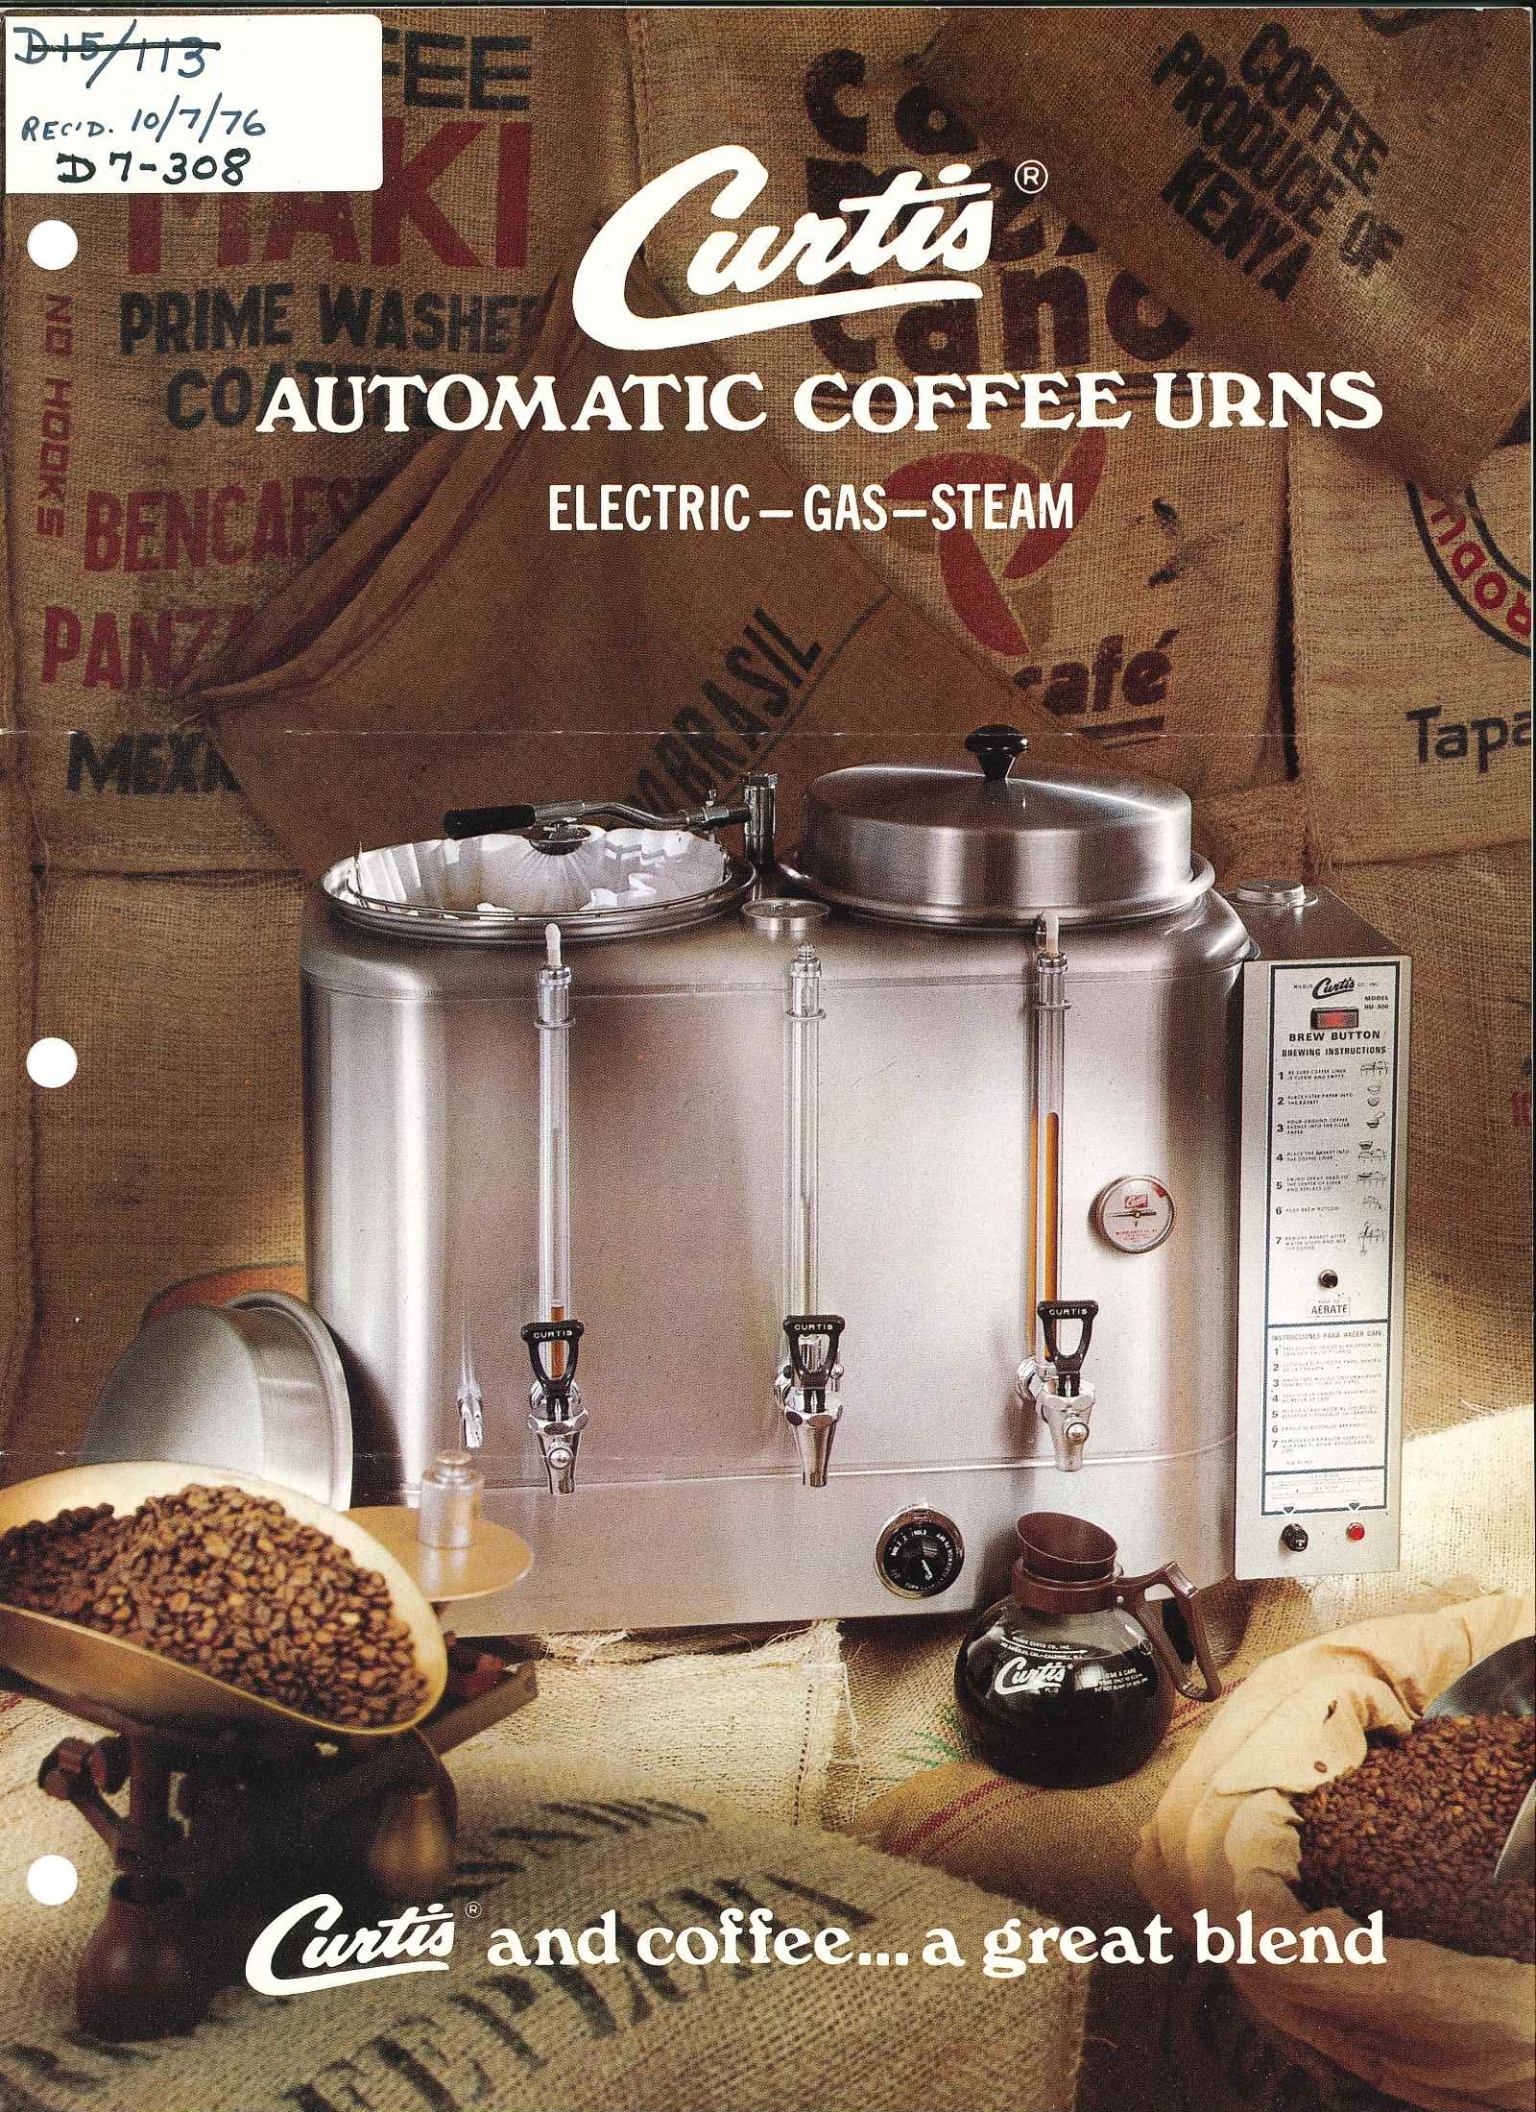

Curtis® and coffee... a great blend

AUTOMATIC COFFEE URNS
ELECTRIC – GAS – STEAM

Curtis fully automatic, push-button controlled coffee urns assure perfectly brewed coffee every time. With the Curtis Full-Line Automatic Coffee Urns, you get a choice of sizes to suit your needs; Twin—3, 6 or 10 gallon and Single—3 or 6 gallon. Automatic refill during brew cycle—thermostatically controlled for near-instant recovery. Close-lid brewing for greater coffee flavor and full coffee aroma. Rain-soft water from Swing-Spray Head saturates coffee evenly for proper extraction. Heavy-gauge stainless steel construction with electrically welded seams assures easy cleaning and long-lasting, gleaming appearance. Backed by over 30 years experience in developing and manufacturing high quality coffee brewing equipment, the Wilbur Curtis Company guarantees all urn bodies with a two-year warranty against leakage or burn-out.

SPECIFICATIONS

	RU-300	RU-600	RU-1000	RU-150	RU-225
CAPACITY (Finished Brew)	3 Gallons Each Side	6 Gallons Each Side	9 Gallons Each Side	3 Gallons	6 Gallons
COFFEE PER HOUR	Up to 25 Gallons	Up to 30 Gallons	Up to 35-50 Gallons	Up to 13 Gallons	Up to 15 Gallons
ELEMENTS AMPERAGE	8 KW 36 AMPS 6 KW 29 AMPS	10 KW 45 Amps	10 KW 45 Amps	5 KW 23 Amps	7 KW 32 Amps
APPROX. SHIP WT.	95 lbs.	120 lbs.	170 lbs.	80 lbs.	95 lbs.

ELECTRICAL
115-208-220 VAC—60-cycle—3-wire—single-phase

GAS
Since solenoid valve is rated for hot water (140°-180°), we recommend the Automatic Gas Urns be connected to a hot water supply for faster recovery.

STEAM
Specify pressure (low 0-15 lbs.) or (high 15-50 lbs.).

RU-150
SINGLE 3 GALLON UP TO 13 GALLONS PER HOUR

RU-225
SINGLE 6 GALLON UP TO 15 GALLONS PER HOUR

RU-1000
TWIN 10 GALLON UP TO 35-50 GALLONS PER HOUR

RU-600
TWIN 6 GALLON UP TO 30 GALLONS PER HOUR

RU-300
TWIN 3 GALLON UP TO 25 GALLONS PER HOUR

STANDARD FEATURES ON CURTIS AUTOMATIC URNS

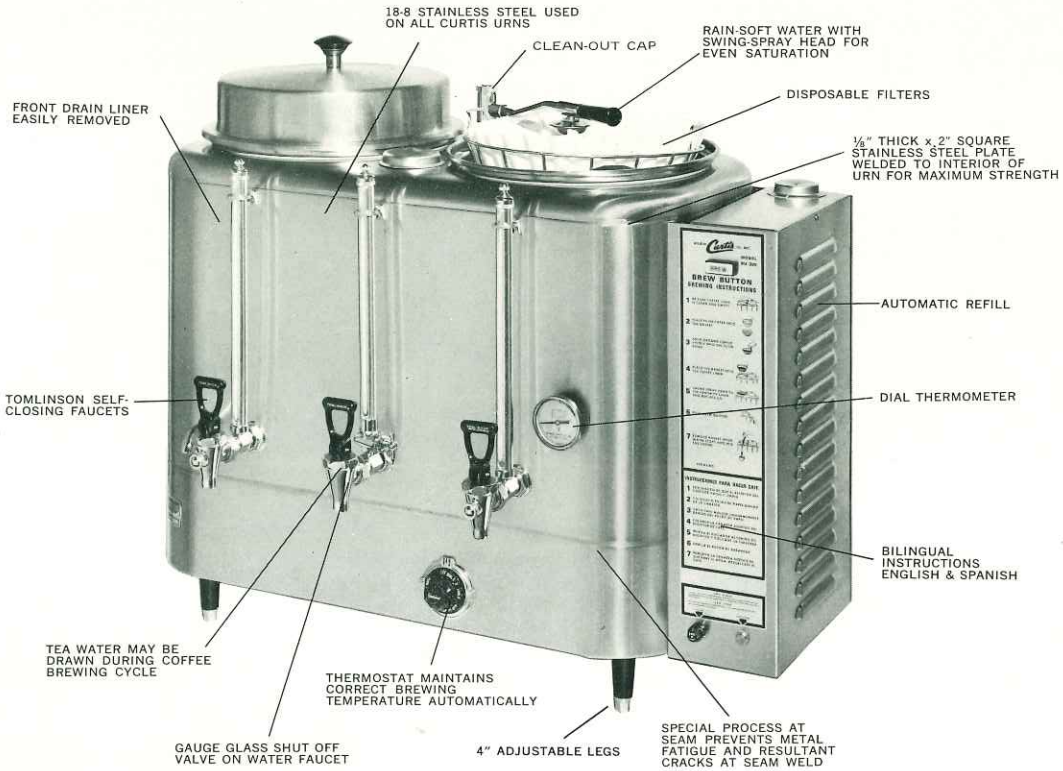
18-8 STAINLESS STEEL USED ON ALL CURTIS URNS
CLEAN-OUT CAP
RAIN-SOFT WATER WITH SWING-SPRAY HEAD FOR EVEN SATURATION
DISPOSABLE FILTERS
FRONT DRAIN LINER EASILY REMOVED
⅛" THICK x 2" SQUARE STAINLESS STEEL PLATE WELDED TO INTERIOR OF URN FOR MAXIMUM STRENGTH
AUTOMATIC REFILL
TOMLINSON SELF-CLOSING FAUCETS
DIAL THERMOMETER
BILINGUAL INSTRUCTIONS ENGLISH & SPANISH
TEA WATER MAY BE DRAWN DURING COFFEE BREWING CYCLE
THERMOSTAT MAINTAINS CORRECT BREWING TEMPERATURE AUTOMATICALLY
GAUGE GLASS SHUT OFF VALVE ON WATER FAUCET
4" ADJUSTABLE LEGS
SPECIAL PROCESS AT SEAM PREVENTS METAL FATIGUE AND RESULTANT CRACKS AT SEAM WELD

PUSH-BUTTON OPERATION

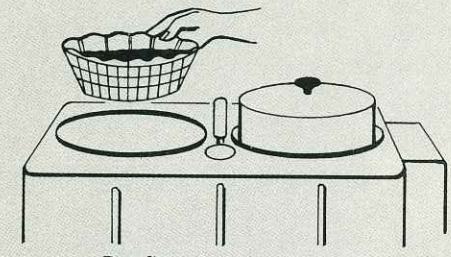

Put filter paper in basket with proper amount of coffee grounds—place basket in coffee liner

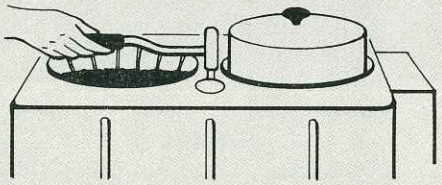

Swing-Spray Head over center of liner

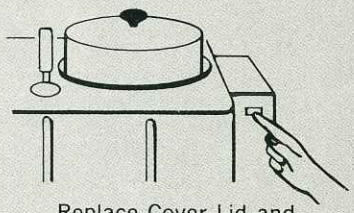

Replace Cover Lid and push Brew Button

OPTIONAL EQUIPMENT

- DOUBLE SERVICE
- THREE–PHASE, 4-WIRE ELEMENT CIRCUIT WITH D-33 THERMOSTAT
- BY-PASS (STANDARD ON ALL URNS)
- 15 KW-68 Amps ELEMENTS ON RU-1000 URNS
- EMERGENCY REFILL VALVE
- AUTOMATIC AGITATOR-AERATOR (Blends coffee automatically at end of brew cycle. Includes manual button for between–batch blending.) **STANDARD ON RU-1000**
- HALF-BATCH BREW CYCLE STANDARD ON RU-600, RU-1000, AND RU-225 (Not available on smaller urns)
- U.L. LISTED

COFFEE MAKER UL LISTED

NSF

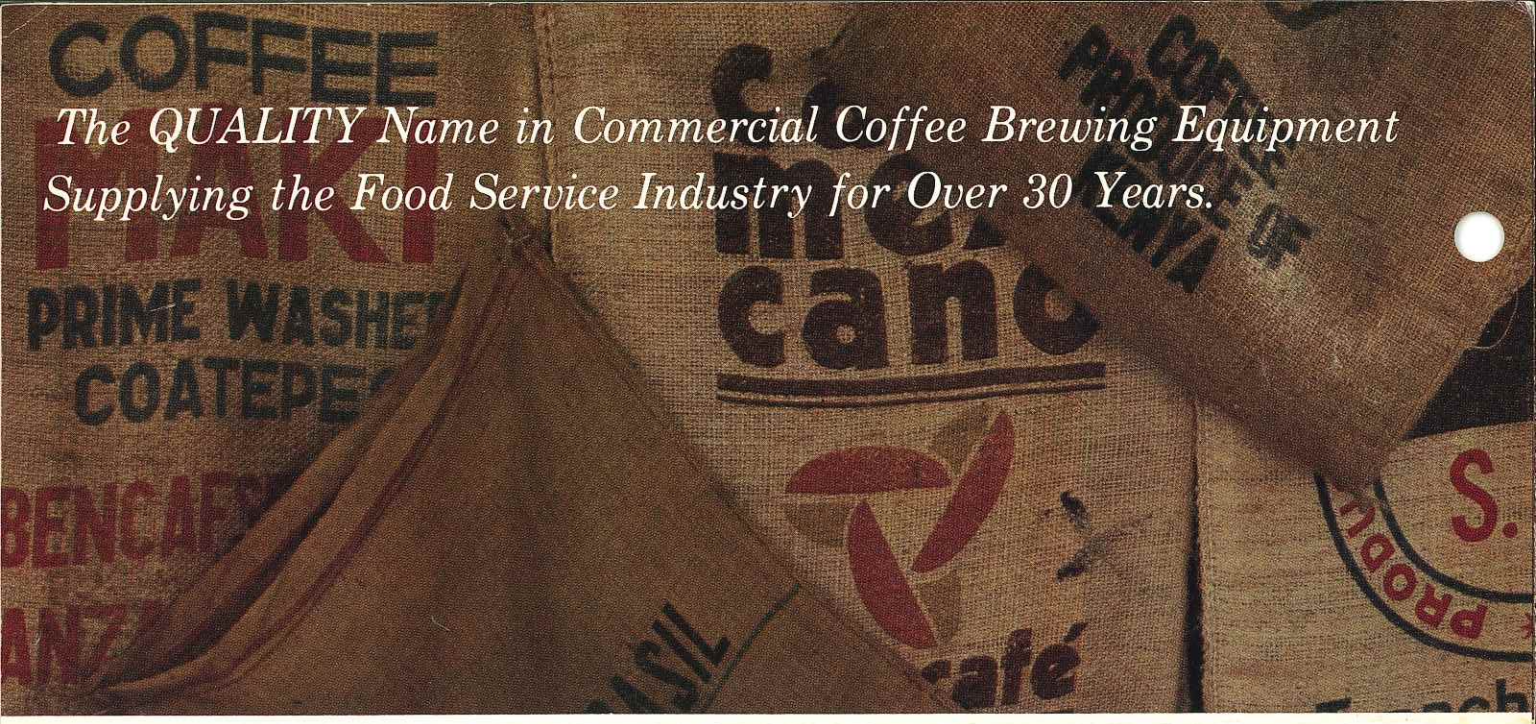

The QUALITY Name in Commercial Coffee Brewing Equipment
Supplying the Food Service Industry for Over 30 Years.

Mail dated October 7, 1976

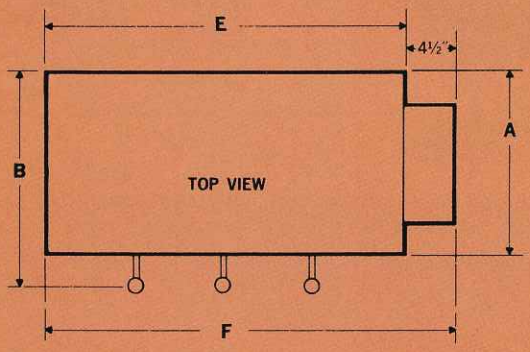

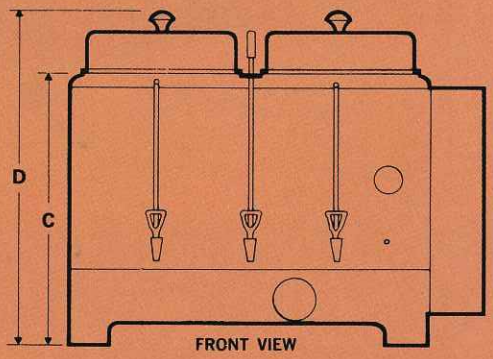

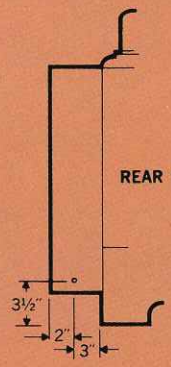

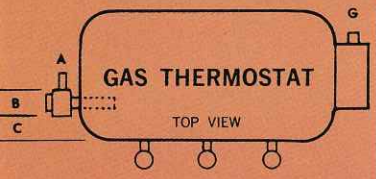

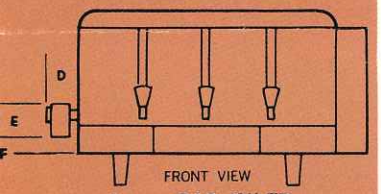

A GAS INLET
B 3⅜"
C 3½"
D 3¾"
E 4"
F 3½"
G WATER INLET
¼" FLARE FITTING

DIMENSIONS

	RU-300	RU-600	RU-1000	RU-150	RU-225
A	14"	17"	17"	16⅜"	16⅜"
B	17½"	20½"	20½"	19⅞"	19⅞"
C	24"	27½"	34¼"	24"	27½"
D	29¼"	32½"	39¼"	29¼"	32½"
E	28"	33½"	33½"	19"	19"
F	32½"	38¼"	38¼"	23¾"	23¾"

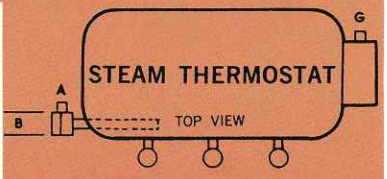

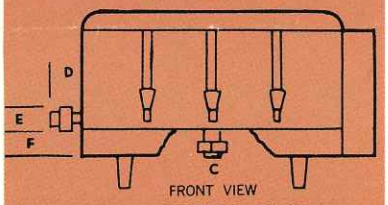

A STEAM INLET
B 1¼"
C STEAM OUTLET
D 3¼"
E 2½"
F 4"
G WATER INLET
¼" FLARE FITTING

WILBUR Curtis® CO., INC.
1781 North Indiana Street
Los Angeles, California 90063
Phone (213) 269-8121

Warehouse Division
4 Commerce Road
Fairfield, New Jersey 07006

Produced by Simms Photography, Downey, Calif.

Printed in U.S.A.

~~D15/113~~
REC'D. 10/7/76
D7-308

Curtis® JR.

NEW AUTOMATIC COFFEE URN

MODEL JR-3
Twin 3 Gallon
Up to 20 gallons coffee per hour.

Wilbur Curtis Co., Inc. Introduces a New Low Priced Fully Automatic Coffee Urn.

The CURTIS JR. URN has features that make other low priced urns obsolete. Included at no extra charge are Automatic Refill, Bypass Valve, NSF Covers, Fresh Water Brewing and a unique electrical system incorporating three heating elements for low wattage, high wattage, single or three phase and a built in spare for quick service.

Modern and compact styling adds to the decor of all Foodservice Establishments.

STANDARD FEATURES:
- Automatic Refill
- Bypass Valve
- NSF Covers
- Three Heating Elements

OPTIONAL EQUIPMENT:
- Agitator-Aerator Kit
- Double Service

MODEL JR-3 SPECIFICATIONS

DIMENSIONS		ELECTRICAL DATA			
		PHASE	VOLTAGE	WATTS	AMPS
LENGTH	32½"	SINGLE	208	6,000	29
DEPTH	17½"	SINGLE	208	9,000	43
		SINGLE	220	6,000	27
HEIGHT (working)	20½"	SINGLE	220	9,000	40
		THREE	208	9,000	26
WEIGHT	90 LBS.	THREE	220	9,000	23

Mail dated
October 7, 1976

~~D15/113~~ 10/7/76 REC'D. ↑ D7-308

NEW! Captures ALL the convenience of freeze-dried coffee!

Exclusive "*whirl-action*" mixes instantly...automatically!

Now, you can make 4 gallons of piping hot freeze-dried coffee automatically at the touch of a button. You get all of the freeze-dried convenience that you're paying for!

Easy to use! Just touch the button. Add the coffee.

Fills automatically with piping hot water. Exclusive built-in "whirl-action" mixes instantly, stirs coffee automatically while filling. Automatic shut-off delivers precise amount of water. Thermostatically controlled temperature keeps coffee at serving temperature.

Gleaming heavy duty, stainless steel urn body and cover wipe sparkling clean with a damp cloth.

SPECIFICATIONS

Electrical: 208/240 Volts
5 KW Standard
(Higher wattage available)

Dimensions: Length: 16"
Depth: 19¾" (Center of Faucet)
Height: (Work with 4" Legs) 21¾"
Shipping Weight: 62 lbs.

CURTIS AUTOMATIC freeze-dried COFFEE URN

MODEL FD-4A
4 Gallon

DISTRIBUTED BY:

Curtis®

WILBUR CURTIS CO., INC.
1781 North Indiana Street
Los Angeles, California 90063
Telephone (213) 269-8121

PRINTED IN U.S.A.

Mail dated
October 7, 1976